

# FrelTec

Mathildenstr. 10A  
82319 Starnberg  
Germany

## High Efficient Surface Mount Rectifier SMA

SMA

High Efficient Surface Mount Rectifier

SPECIFICATION

68B	HSO_ _xxxxx	SMAX	L0H
Type	Type	Package	Packing
68B: Surface Mount Superfast recovery Rectifier	HSO_ _	SMA	L0H: Embossed tape and reel for 7,5k pcs(13" reel)

All products according to RoHS (2015/863/EU)




SMA

High Efficient Surface Mount Rectifier




HSOAA thru HSOMA

PACKAGE OUTLINE



DO-214AC(SMA)

in inches (millimeters)

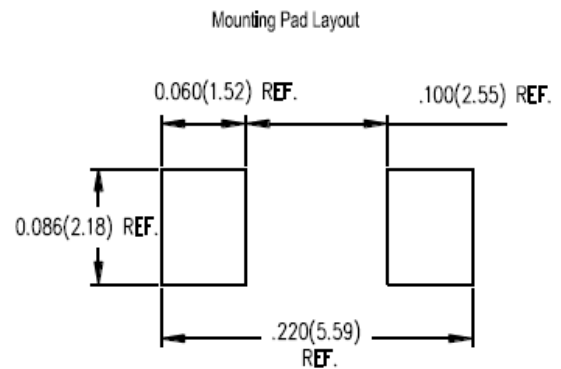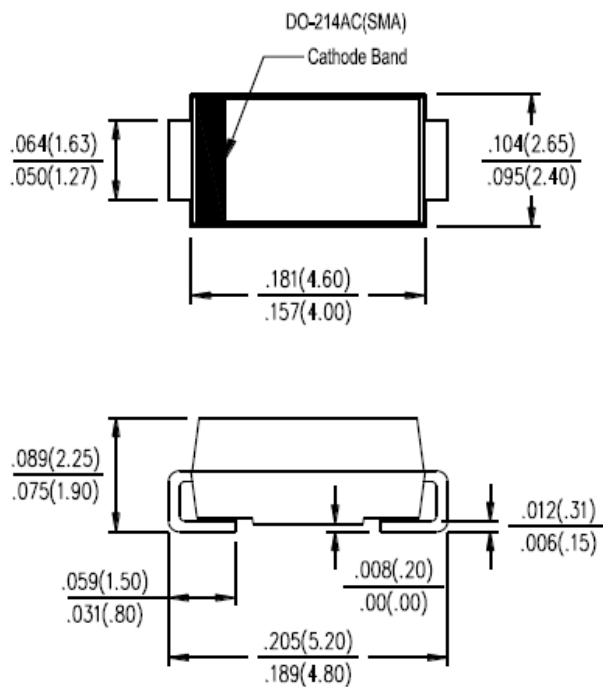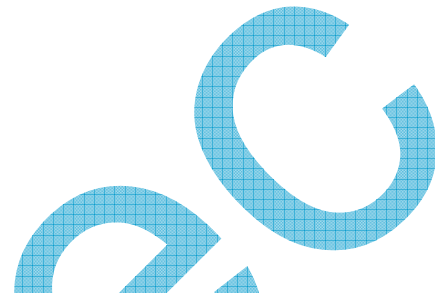

## SMA

## High Efficient Surface Mount Rectifier

### Maximum Ratings & Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	HSOAA	HSOBA	HSODA	HSOFA	HSOGA	HSOJA	HSOKA	HSOMA	Unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	300	400	600	800	1000	V
Maximum RMS voltage	VRMS	35	70	140	210	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	300	400	600	800	1000	V
Maximum average forward rectified current	IF(AV)	1,5								A
Peak forward surge current 8,3 ms single half sine-wave superimposed on rated load	IFSM	50								A
Rating for fusing(t<8,3ms)	I <sup>2</sup> t	10,4								A <sup>2</sup> sec
Operating junction and storage temperature range	TJ,TSTG	-55 to +150								°C

Electrical Characteristics (TA = 25°C unless otherwise noted)											
Parameter	Test Conditions	Symbols	HSOAA	HSOBA	HSODA	HSOFA	HSOGA	HSOJA	HSOKA	HSOMA	Unit
Maximum instantaneous forward voltage	IF=1,5A TA=25°C	VF		1,0			1,3		1,7		Volts
Maximum DC reverse current at rated DC blocking voltage	TA=25°C	IR	5,0								uA
	TA=125°C		100								
Maximum reverse recovery time	IF=0,5A, IR=1,0A IRR=0,25A	trr			50				75		nS
Typical junction capacitance	4,0V, 1 MHz	Cj			15				10		pF

Thermal Characteristics										
Parameter	Symbols	HSOAA	HSOBA	HSODA	HSOFA	HSOGA	HSOJA	HSOKA	HSOMA	Unit
Typical thermal resistance <sup>(1)</sup>	R <sub>θJA</sub>	65								°C /W
	R <sub>θJC</sub>	26								
	R <sub>θJI</sub>	2								

Notes: 1).The thermal resistance from junction ambient, case or mount, mounted on P.C.B with 5X5mm copper pads, 2 OZ, FR4 PCB

SMA

Characteristics(Typical)

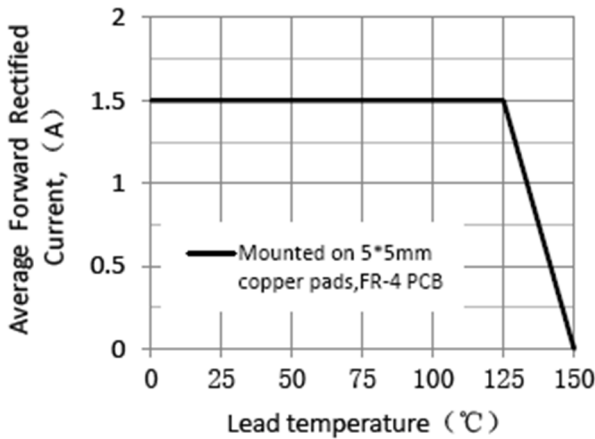


Figure 1. Forward Current Derating Curve

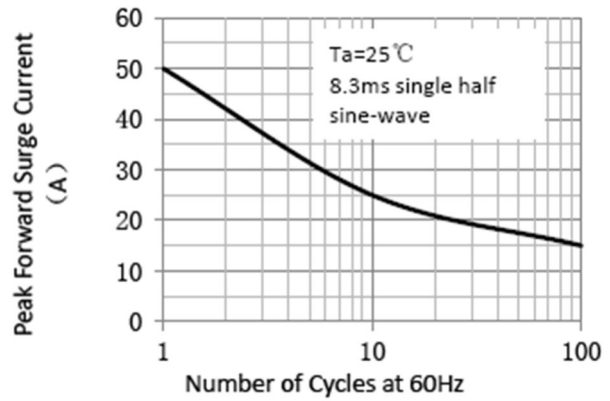


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

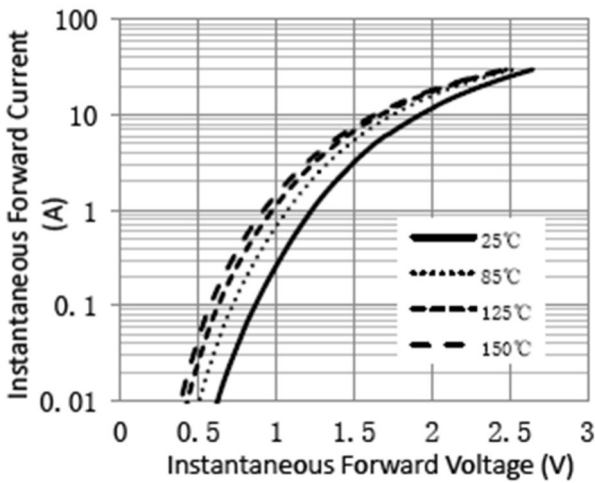


Figure 3. Typical Reverse Characteristics

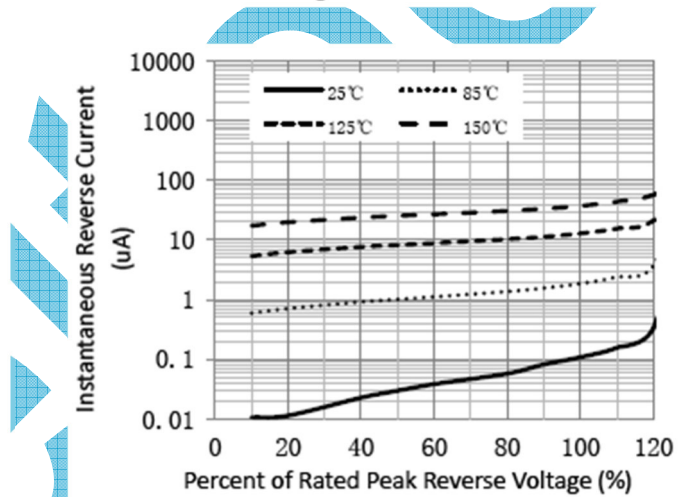


Figure 4. Typical Instantaneous Forward Characteristics

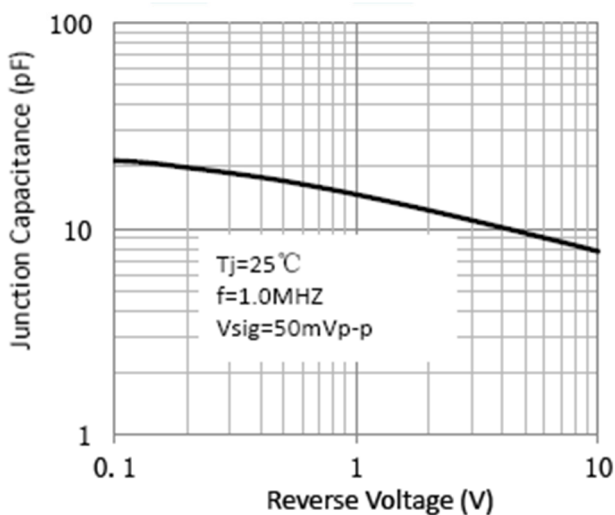



Figure 5. Typical Junction Capacitance

SMA

High Efficient Surface Mount Rectifier

Size (Unit:mm)


Tape & Reel Specification

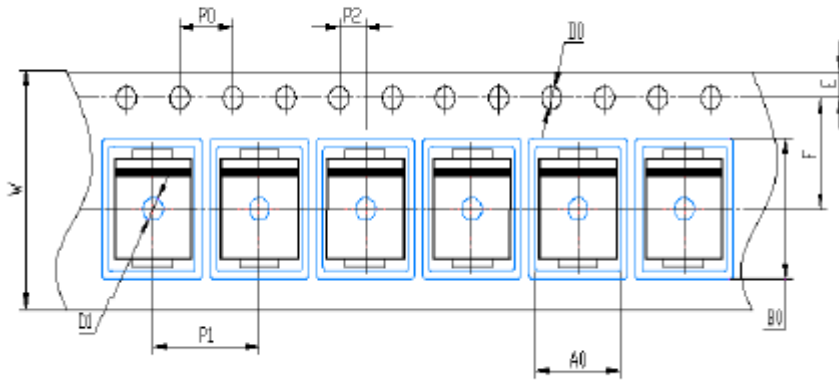

Symbols	SMA(mm)
W	12±0.2
E	1.75±0.1
F	5.5±0.05
D0	1.5±0.1
D1	1.50 +0.1/-0
P0	4.0±0.1
P1	4.0±0.1
P2	2.0±0.05
A0	2.65±0.1
B0	5.25±0.1



**Soldering Parameters**

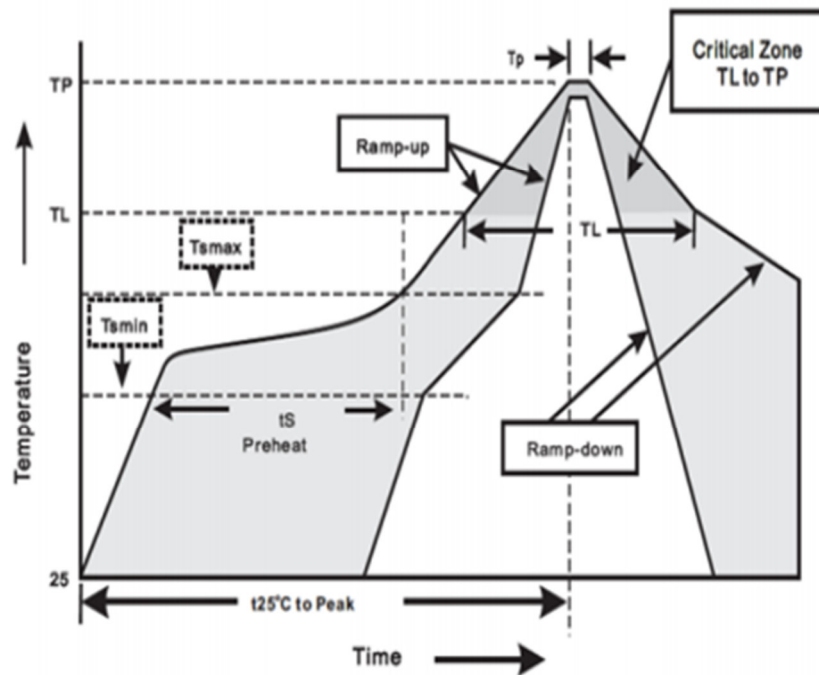

FrelTec

**Stock period**

The performance of these products, including the solderability, is guaranteed for 12 month, provided that they remain packed as they were when delivered and stored at a temperature of 20-30°C and a relative humidity 20-60%RH

11/5/2020

© FrelTec® GmbH

Please read cautions and warnings and important notes at the end of this document.

The following applies to all products named in this publication:

1. The information describes the type of component and shall not be considered as assured characteristics.
2. Terms of delivery and rights to change design reserved.
3. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. Nevertheless, we explicitly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, FrelTec® is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a FrelTec® product with the properties described in the product specification is suitable for use in a particular customer application.
4. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
5. The warnings, cautions and product-specific notes must be observed.
6. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous"). Useful information on this will be found in our Material Data Sheets. Should you have any more detailed questions, please contact our sales offices.
7. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true for the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available.
8. Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General conditions for the supply of products and services of the electrical and electronics industry" published by the German Electrical and Electronics Industry Association (ZVEI), available at [www.freltec.com](http://www.freltec.com).
9. As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.
10. The trade name FrelTec® is a trademark registered or pending in Europe and in other countries.